Hydraulic Pneumatic Services Ltd Unit 17, King Street Trading Estate, Middlewich, Cheshire, CW10 9LF (UK) Tel: +44 (0)1606 835725 www.trojanpumps.com



Trojan Type - 'M'


Trojan Type 'M'

The Trojan Type 'M' air driven pumps, are a tried and tested series of units designed to deliver a wide range of fluids to pressures up to 3,040 bar. The range features

- 12 models ranging from 29 bar to 3,040 bar.
- Volume outputs from 0 to 37 litres/minute.
- Minimum air pressure required to start pump will be up to 1 bar.
- Low pressure running version available.
- Available in portable pressure test packages.
- Stainless steel wetted parts
- Suitable for pumping water, oil and a wide range of fluids.
- Automatic stall against a closed outlet with no air consumption, automatic re-start.
- ATEX
- Powered by any fixed or portable compressed air source up to 8 bar.
- Infinitely variable capacity and discharge pressure by simple regulation of air supply.

Trojan Type – 'M' RATIO 1:	4.4	9.9	13.8	17.6	28	38	53	79	114	159	256	400
OUTPUT/CYCLE CC	195	86	62	48	30	22	16	10	7	5	3	2
MAXIMUM FREE FLOW litres/minute	37	23	15	11	7.3	5.8	3.8	2.8	1.8	1.5	0.84	0.58
OUTPUT PRESSURE (BAR) (With an air supply of 7 bar)	29	65	90	115	185	250	350	525	755	1055	1700	2660
MAX. OUTPUT PRESSURE (BAR) (With an air supply of 8 bar)	33	75	104	133	212	288	402	600	866	1208	1945	3040

Trojan Type 'M' Pump, Dimensions.

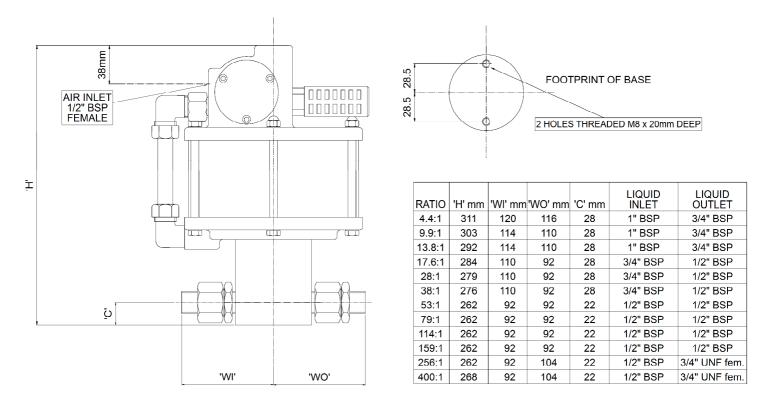

The Trojan Type 'M' can also be supplied in the form of a complete, ready to use Powerpack. Contact your supplier for more details.



Trojan Type 'M' Portable Powerpack.

Pumps and spares are available from:-

Hydraulic Pneumatic Services Ltd, Unit 17, King Street Trading Estate Middlewich, Cheshire UK CW10 9LF Tel: +44 (0)1606 835725

www.trojanpumps.com