

Hydraulic Pneumatic Services Ltd
 Unit 17,
 King Street Trading Estate,
 Middlewich, Cheshire,
 CW10 9LF (UK)
 Tel: +44 (0)1606 835725
 Fax: +44 (0)1606 737358
www.pressure-pumps.co.uk

Trojan Type 'M'




Trojan Type - 'M'

The Trojan Type 'M' air driven pumps, are a tried and tested series of units designed to deliver a wide range of fluids to pressures up to 2660 bar. The range features

- 12 models ranging from 29 bar to 2,660 bar.
 - Volume outputs from 0 to 37 litres/minute.
 - Minimum air pressure required to start pump will be up to 1 bar.
 - Low pressure running version available.
 - Available in portable pressure test packages.
 - Stainless steel wetted parts
 - Suitable for pumping water, oil and a wide range of fluids.
 - Automatic stall against a closed outlet with no air consumption, automatic re-start.
 - ATEX II, Cat. 2, GD T5
- Powered by any fixed or portable compressed air source up to 8 bar.
 - Infinitely variable capacity and discharge pressure by simple regulation of air supply.

Trojan Type – 'M' RATIO 1:	4.4	9.9	13.8	17.6	28	38	53	79	114	159	256	400
OUTPUT/CYCLE CC	195	86	62	48	30	22	16	10	7	5	3	2
MAXIMUM FREE FLOW litres/minute	37	23	15	11	7.3	5.8	3.8	2.8	1.8	1.5	0.84	0.58
MAX. OUTPUT PRESSURE (BAR) (With an air supply of 7 bar)	29	65	90	115	185	250	350	525	755	1055	1700	2660

Trojan Type 'M' Pump, Dimensions.

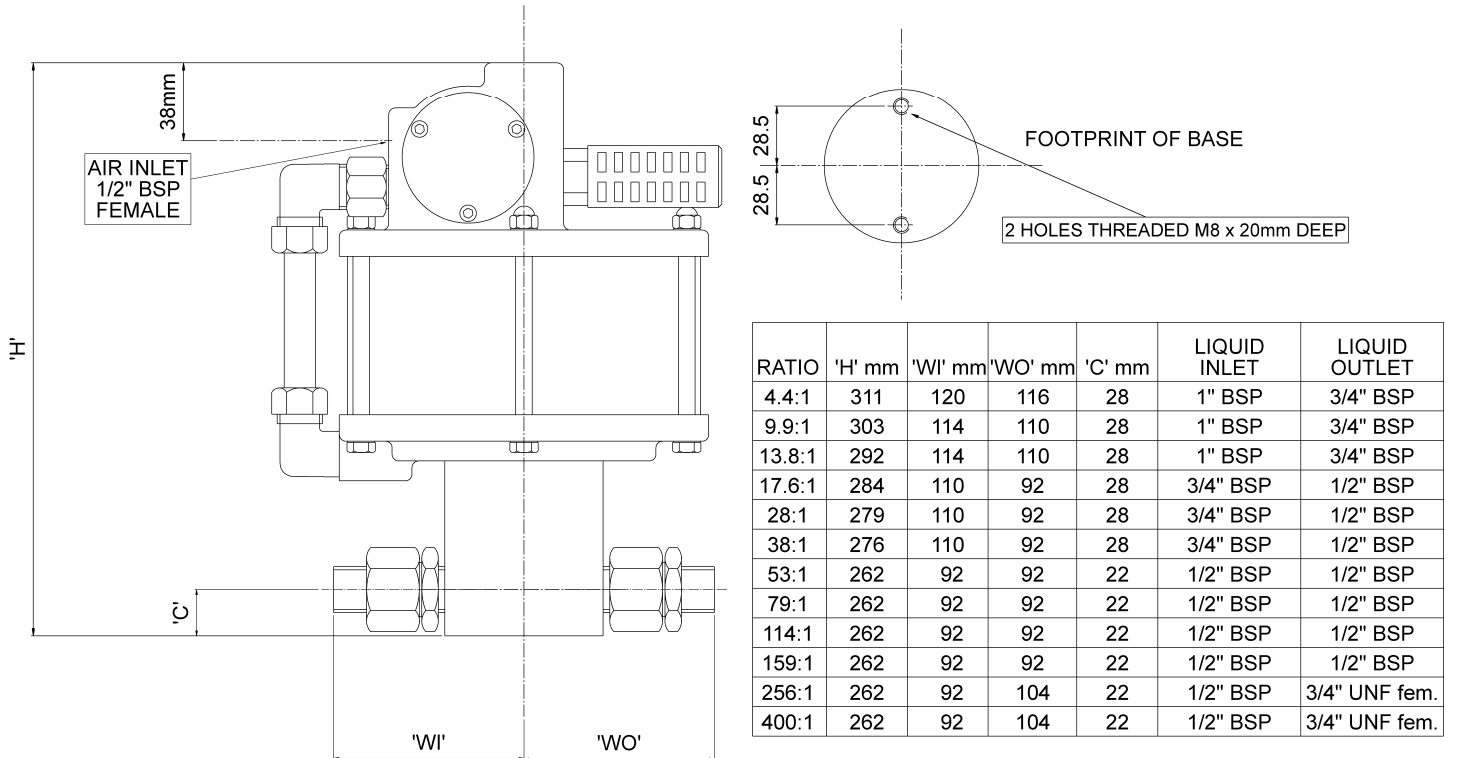

The Trojan Type 'M' can also be supplied in the form of a complete, ready to use Powerpack. Contact your supplier for more details.



Trojan Type 'M' Portable Powerpack.

Pumps and spares are available from:-

Hydraulic Pneumatic Services Ltd,
 Unit 17, King Street Trading Estate
 Middlewich
 Cheshire UK Tel: +44 (0)1606 835725
 CW10 9LF Fax: +44 (0)1606 737358

www.pressure-pumps.co.uk